2020 Joint LACE Data Assimilation & DAsKIT Working Days, Vienna, 14-17 September 2020





Data assimilation activities at RMI (Belgium)

Presented by : Idir DEHMOUS

Operational setup at RMI

Operational Forecast models

ALARO cy43t2


Resolution 4km, 432x432 grid points Number of levels 87 Time step 180 s Coupling model ARPEGE Coupling frequency 1 hour Forecast range 60h at 00, 06, 12, 18h Initialisation First ARPEGE coupling file

ALARO (high resolution) cy43t2


Resolution	1.3km , 576x576 grid points
Number of levels	87
Time step	45 s
Coupling model	ALARO 4km
Coupling frequency	1 hour
Forecast range	36h at 00, 06, 12, 18h
Initialisation	First ALARO coupling file
	5 5 5 5 5

DAsKit Working days, Vienna September 2020

CLSTEMPERATURE 2020/08/01 z00:00 +1h



CLSTEMPERATURE 2020/03/01 z00:00 Initialized




Operational Forecast models

AROME cy43t2

AROME is the new operational forecast model at RMI since June 2020

Resolution	1.3km , 576x576 grid points
Number of levels	87
Time step	45 s
Coupling model	Nested with ALARO 4km
Coupling frequency	1 hour
Forecast range	48h at 00, 06, 12, 18h
Initialisation	Surface : Canari_Oimain
	Upper-air: None

CLSTEMPERATURE 2020/03/01 z00:00 Initialized





Data assimilation progress and activities

AROME operational setup with surface DA


Resolution	: 1.3 km
Observations	: Synop
Upper-air analysis	: None
Surface analysis	: CANARI_Oimain
Cycling frequency	: 3h hours
Coupling model	: ALARO 4km
Production time	: 00, 06, 12, and 18h with 48h forecast
	range

SYNOP observations over AROME-Belgium domain




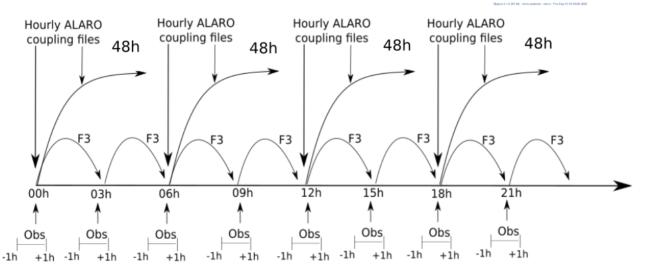

AROME operational setup with surface DA

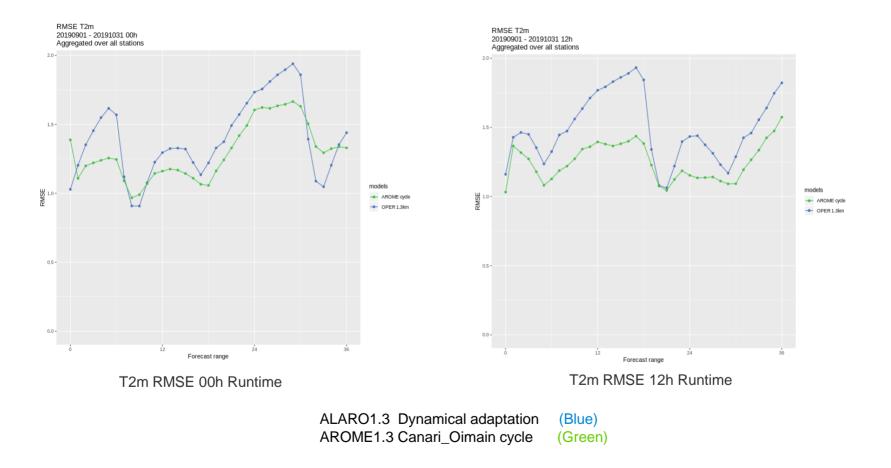

AROME operational setup with surface DA

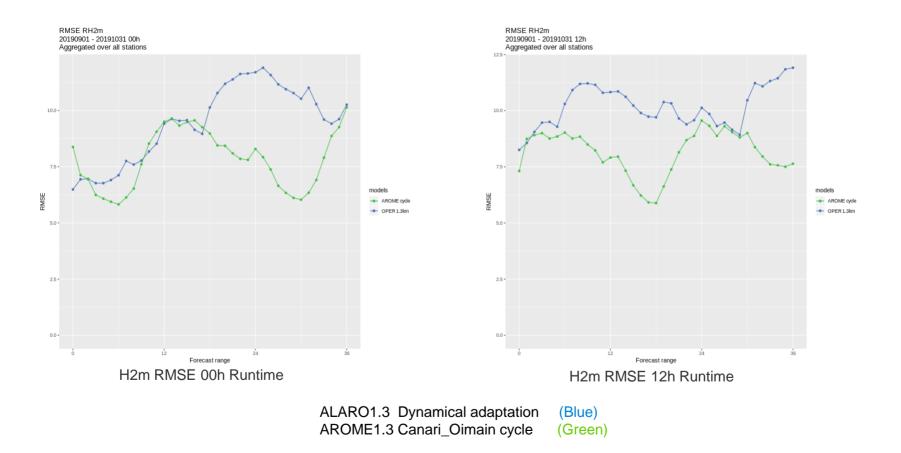


Configurations under testing

Combination of surface CANARI and 3Dvar for ALARO

The experiment setup


- 3h assimilation cycle
- 1h hour observations cut-off
- Period : from 01-03-2020 to 31-03-2020
- 60h forecast range with 4 production time , 00, 06 , 12 and 18h
- Observation used : SYNOP , AMDAR and TEMP

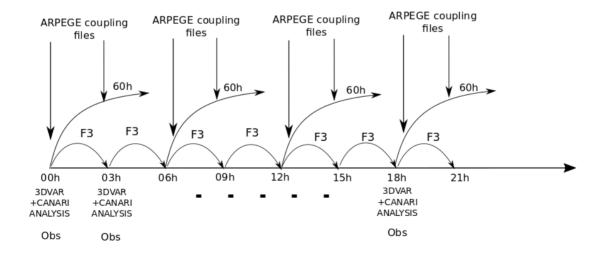

Combination of surface CANARI and 3Dvar for ALARO

The experiment setup

- B matrix computed using NMC method
- 3h assimilation cycle
- 1h hour observations cut-off
- Period : from 01-03-2020 to 31-03-2020
- 60h forecast range with 4 production time , 00, 06 , 12 and 18h
- Observation used : SYNOP , AMDAR and TEMP

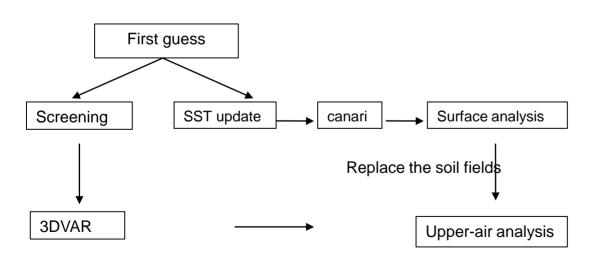


Surface and soil temperature, and water content (ice content for snow analysis)

SURFRESERV.EAU PROFRESERV.EAU SURFRESERV.GLACE PROFRESERV.GLACE SURFRESERV.NEIGE PROFTEMPERATURE SURFTEMPERATURE SURFRESERV.INTER SURFALBEDO.NEIG


Preliminary scores

The T2m RMSE of ALARO cycle is decreased considerably compared to the operational (dynamical adaptation).

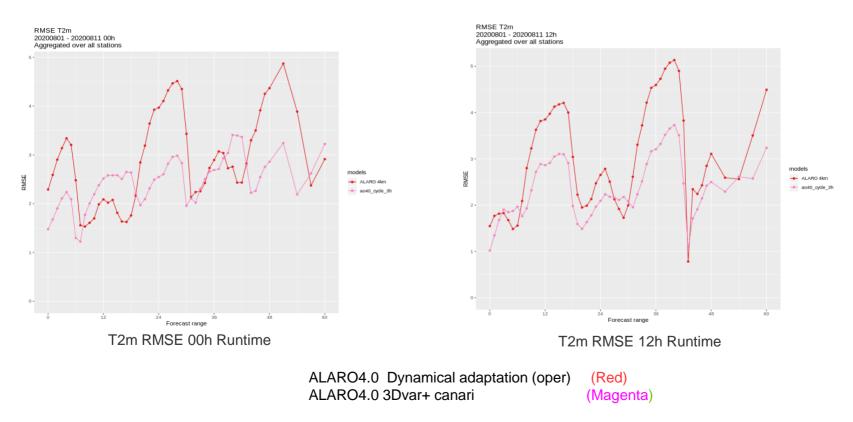

Preliminary scores

The H2m RMSE of ALARO cycle tends to decrease for the night cycles compared with the diurnal ones.

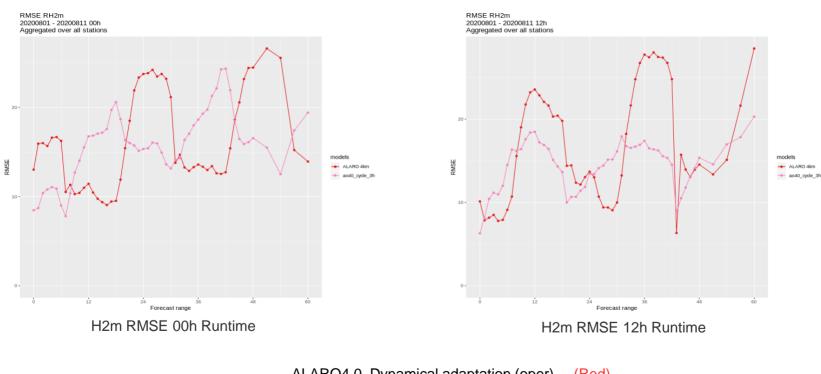



ALARO4.0 Dynamical adaptation (oper) (Red) ALARO4.0 3Dvar+ canari (Magenta)

Preliminary scores

The upper-air temperature departures are decreased for almost all the atmospheric levels, until up to 300 hpa.


The departures are also decreased for the wind speed over upper-air levels, except near the surface we can note a slight degradation.

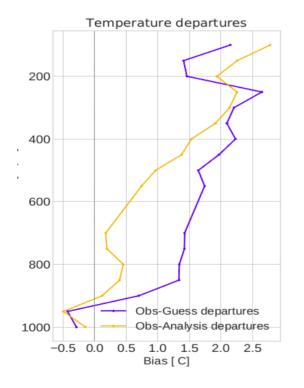

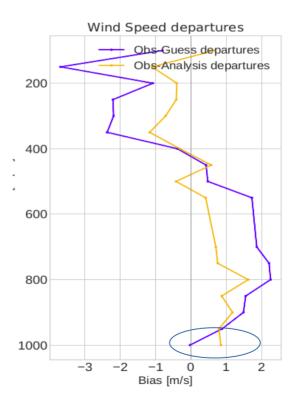


The experiment setup


- B matrix computed using NMC method
- 3h assimilation cycle
- 1h hour observations cut-off
- Period : from 01-03-2020 to 31-03-2020
- 48h forecast range with 4 production runtime , 00, 06 , 12 and 18h
- Observation used : SYNOP , AMDAR and TEMP

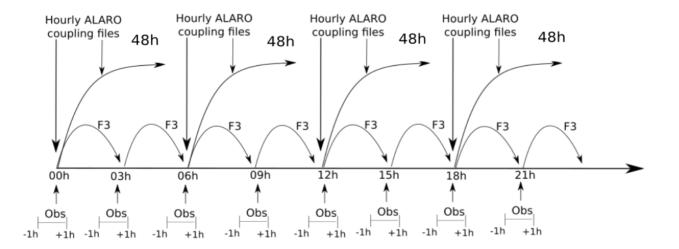

New observation type was introduced The ground based GNSS data from ROBQ and ROBH centres



GNSS stations in AROME-Belgium domain



Stations from ROBQ centre Data every 15 min

Stations from ROBH centre Data every 1 hour


GNSS stations included in the AROME-Belgium domain

The GPS-Sol couldn't be asimilated directly in active mode in 3Dvar.

-Need a passive assimilation to get the ZTD static bias for each station.

-Update the list_gpsol whitelist in BATOR program.


-The period of monitoring extends from 01-01-2020 to 31-01-2020

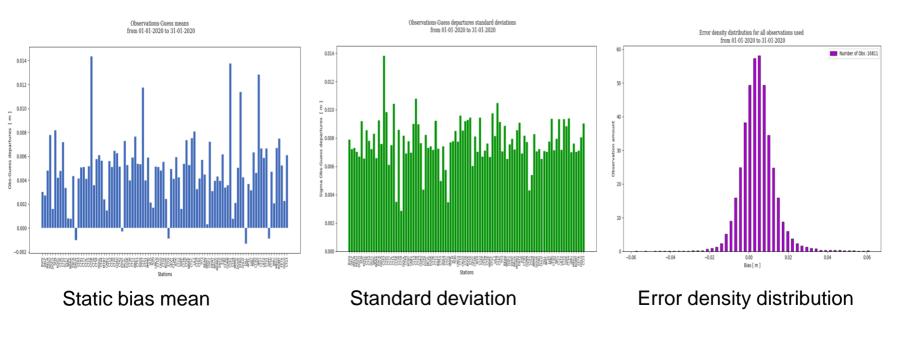

Summary about observation usage in arome 3DVAR+canari

Observation type	Average	• Assimilated parameters		
SYNOP/SHIP AMDAR TEMP GPS-SOL	$ \begin{array}{c} \sim 300 - 350 \\ \sim 150 - 250 \\ \sim 3 - 6 \\ \sim 60 - 70 \end{array} $	 T2m, h2m ,V10 Upper-air U , T Upper-air U ,T and H Zenith Total Delay (ZTD) 		


Observation ratio used for every analysis : 00h runtime, from 01-03-2020 to 31-03-2020

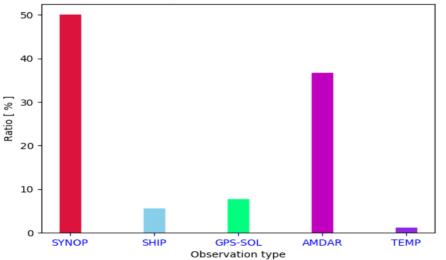

DAsKit Working days, Vienna September 2020

Preliminary results


The assimilation of ZTD in 3DVAR seems to have a neutral impact on T2m parameter.

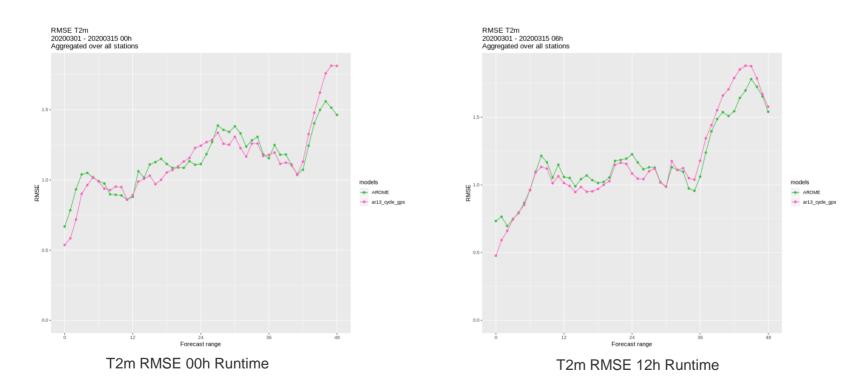


AROME1.3 Canari + synop obs only (Green) AROME1.3 3Dvar + canari_Oimain with all obs (Magenta)

Preliminary results

Not a big difference for the h2m , impact is almost neutral too.

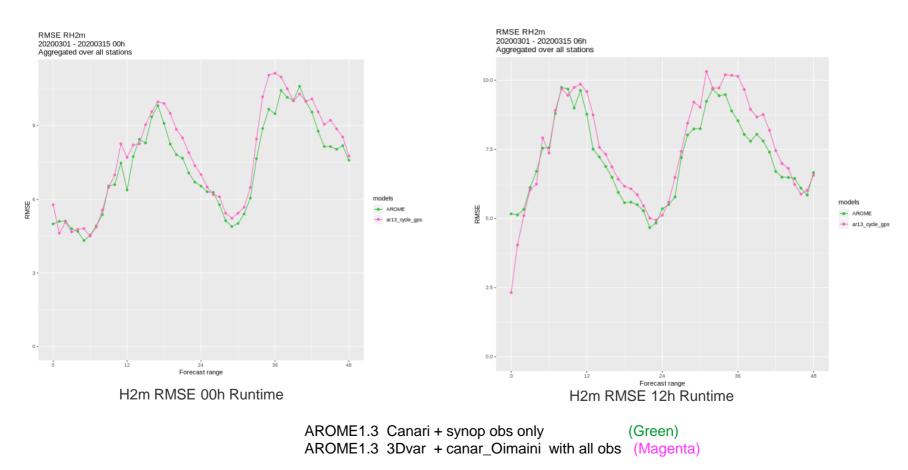

Preliminary results

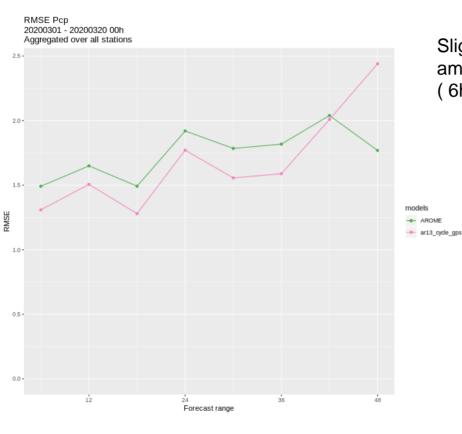

Slight improvement of the cumulated precipitation amount (6h cumulated precipitation)

AROME1.3	Canari + synop obs only	(Green)
AROME1.3	3Dvar + canari_Oimain with all obs	(Magenta)

Conclusion

- AROME suite using CANARI_Oimain with 3h cycle was installed in operational mode during June 2020.
- •
- The scores show considerable improvement for surface parameters like 2 meter temperature and humidity.
- •
- Combination of the 3DVAR and CANARI with the 3 observation type (synop, AMDAR and TEMP) in ALARO 4km seems to be beneficial for an operational implementation.
- •
- The AROME CANARI_Oimain + 3DVAR was implemented successfully and is running in test mode
- •
- The introduction of the GNSS data for AROME didn't show the "expected" improvement. The scores show an improvement for 6h precipitation amount ,however it decreases slightly the T2m bias and is almost neutral for H2m.
- ٠

Main perspectives

- Verification of other parameters and Validation of the current tested configurations, ALARO 3DVAR+Canari and AROME 3DVAR+Canari.
- •
- Testing the VarBC scheme for GNSS data assimilation.
- Improvement of the actual configurations scripts, running already on EcFlow environment, for more robustness and maintainability (Seamless prediction & Project IMA at RMI).
- •
- Use of more available data, (ODIM Radar data and MODE-S)
- •

Thank you for your attention